

Desiré
M&G
MARMI
& GRANITI



Pitture decorative d'eccellenza Excellence in decorative paints

Cercare di realizzare qualcosa di "speciale" è da sempre uno degli obiettivi che ADICOLOR si propone, così come offrire al mercato novità che diano agli utilizzatori grandi soddisfazioni e risultati di prestigio. Riuscire a ricreare, in modo semplice ed economico, l'effetto del MARMO o del GRANITO, per permettere a tutti di poter avere nelle proprie case queste preziose finiture per arredare con ricche zoccolature interne od esterne, preziose colonne, contorni cucine, particolari di bagni o scale, è quello che DESIRE' MARMI & GRANITI è in grado di offrire. Negozi, bar, ristoranti, alberghi ed uffici possono essere arricchiti con queste finiture per incrementarne la loro eleganza, il loro prestigio e la loro esclusività. Ogni tipo di marmo o granito prescelto è fornito in kit che comprende il fondo, la finitura e la protezione lucida, oltre al pennello, alla speciale spatola per l'applicazione ed il pennarello crea fughe.

Creating special finishes and effects to offer the market a wonderful array of options to suit any decorating project with great satisfaction and results of high prestige, has always been ADICOLOR's guiding principle.

Succeeding in creating a product that reproduces the effect of a luxurious and natural stone material such as MARBLE and GRANITE in a truly simple and economical process, is what we are proud to offer with this exciting new product. It is now possible for anyone to easily create fantastic borders, panels, columns and to enrich the appearance of kitchens, bathrooms, staircases or living area. Ideal to produce extraordinary finishes to highlight walls of hotels, restaurants, stores, shopping centers. Each type of marble or granite we have chosen is supplied in a kit that comprises the undercoat, the actual finish effect and the protective varnish, in addition to the application brush, the special distender and the marker for the joints.



Sistema decorativo ad effetto granito e marmo pregiato per interni ed esterni

Faux marble and granite decorative effect finish for interiors and exteriors

SINCERT




adicolor
INDUSTRIA VERNICI



NEW IMPERIAL

(4-5 m² / Kit 1 lt)

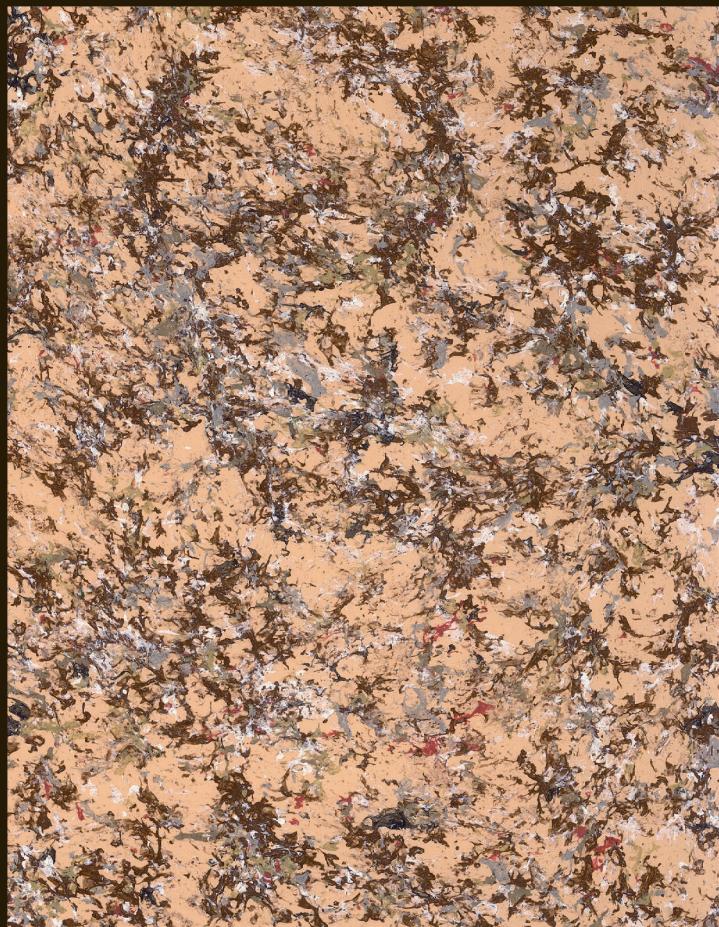

GIALLO VENEZIANO

(4 m² / Kit 1 lt)



BIANCO CARRARA

(7-8 m² / Kit 1 lt)



JUPARANA

(4 m² / Kit 1 lt)



PORRINO

(4-5 m² / Kit 1 lt)



SERIZZO

(5-6 m² / Kit 1 lt)



WHITE KASHMIR

(11-12 m² / Kit 1 lt)



NERO AFRICA IMPALA

(4-5 m² / Kit 1 lt)



Desiré

M&G MARMI &GRANITI

Il marmo facile.

Sistema decorativo ad effetto granito e marmo
pregiato per interni ed esterni

The easy to apply marble effect.


Faux marble and granite decorative effect
finish for interiors and exteriors






Desiré
M&G marmi
& graniti

23

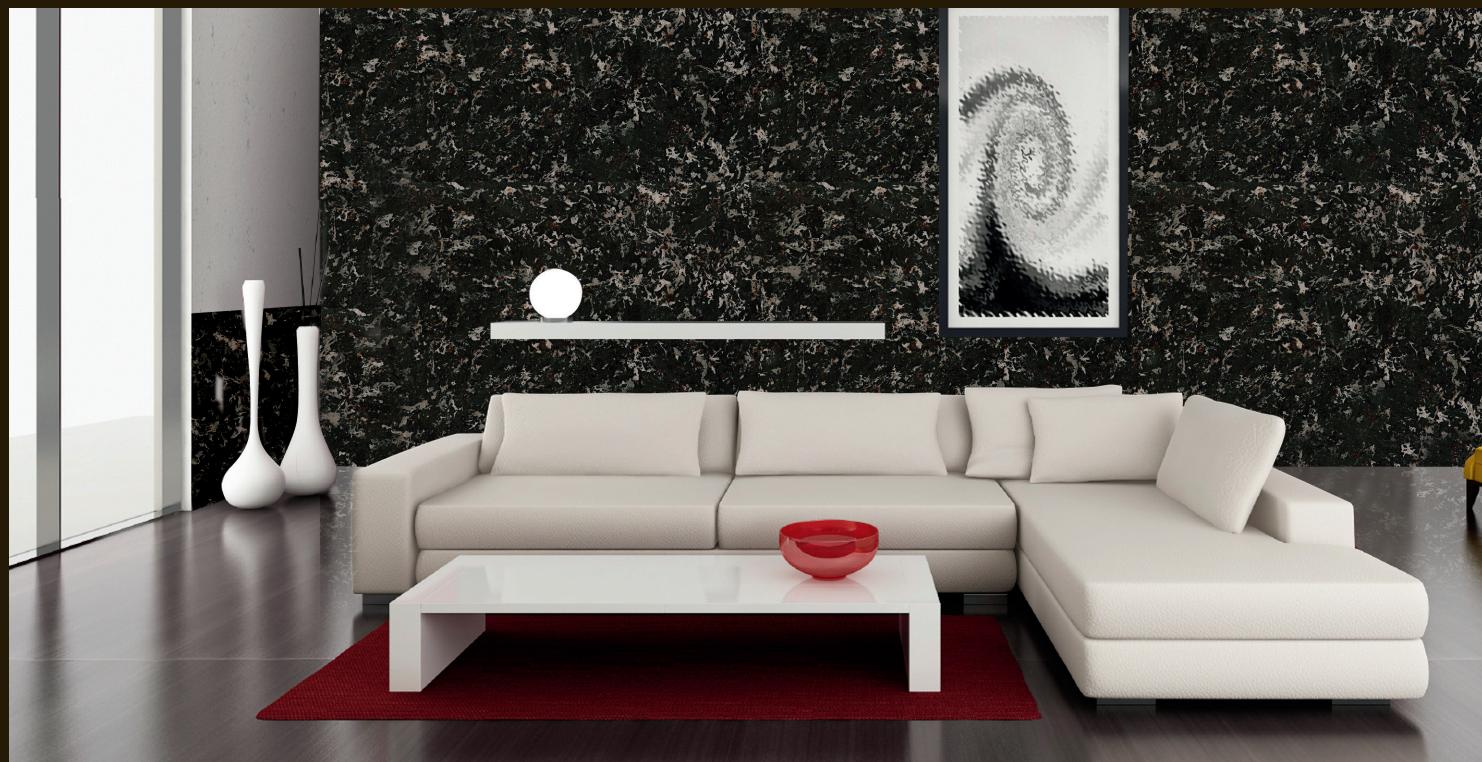

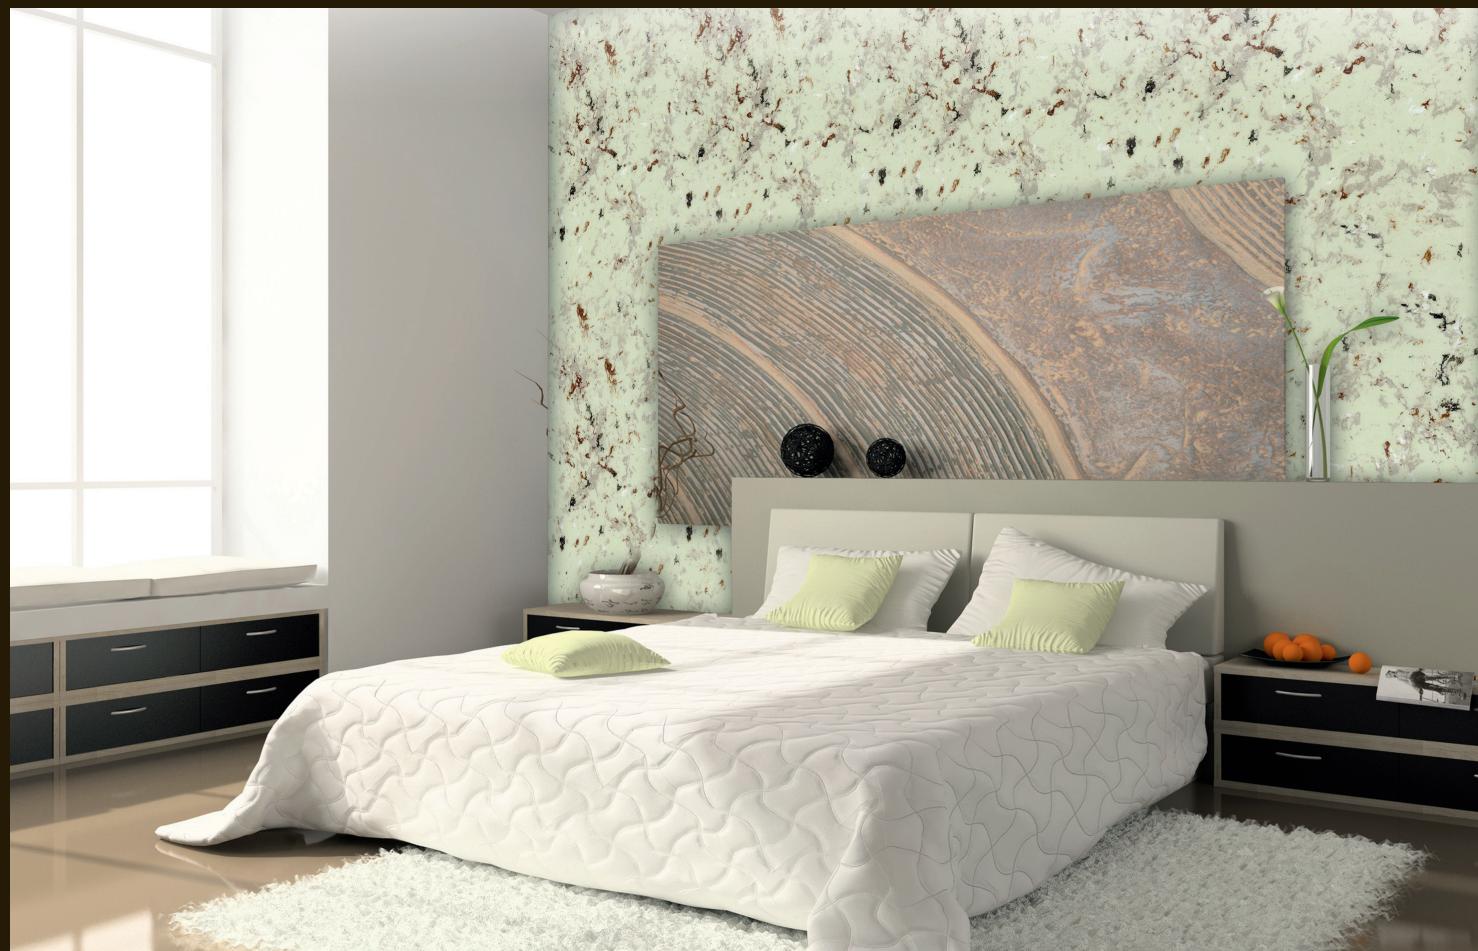



SINCERT

Diluizione :
Fondo:
20-30% con acqua
Desiré MARMI & GRANITI:
pronta all'uso o
max 2-3% con acqua
Adilux: pronto all'uso

Resa teorica:
Fondo:
10-12 mq/lt per mano
Desiré MARMI & GRANITI:
4-12 mq/lt
(in relazione al colore)
Adilux:
10-12 mq/lt per mano

Essicazione a 25°C:
4 ÷ 6 ore al tatto;
circa 24 ore in profondità

Pulizia attrezzi:
acqua calda

Campo d'impiego:

qualsiasi tipo di superficie interna o esterna in gesso o a intonaco.
Preparazione del supporto:
Su fondo asciutto e pulito, applicare 1 o 2 mani a rullo o a pennello
del fondo dedicato diluito al 20/30% con acqua. In casi di muri nuovi,
vecchi sfarinanti o con pitture deboli applicare una mano di ADIFIX
diluito nelle dosi consigliate.

Applicazione:

Stendere la finitura di MARMI & GRANITI con l'apposito pennello
DESIRE' in modo incrociato e disuniforme partendo da un angolo alto
della zona di applicazione per ca. 15-20 min. Quando si inizia notare
una lieve asciugatura del prodotto passare con la spatola Desiré
Distender, molto delicatamente, sempre con movimento incrociato,
per arrivare all'effetto finale. A completa essicazione avvenuta
(ca. 24 ore), applicare, con un rullo a pelo raso, una o due mani della
finitura lucida ADILUX, in base alla brillantezza desiderata. Creare
le finte fughe con l'apposito pennarello in dotazione. È consigliabile
preimpostare le righe con una matita in modo da verificare l'esattezza
di quanto eseguito.

Consigli:

Non applicare a temperatura inferiore a 5°C o superiore a 28°C.
Verificare con attenzione le misure delle pareti onde evitare di restare
senza prodotto durante la lavorazione. Si consiglia di miscelare
eventuali quantità composte da più confezioni tra loro onde non aver
rischi di differenze colore e di utilizzare la finitura dello stesso lotto
di produzione. Teme il gelo



Thinning:

Basecoat:
20 to 30% with water
Desiré MARMI & GRANITI:
Ready to use or
with max 2 to 3% water
Adilux: Ready to use

Spread rate per coat:

Basecoat:
10 to 12 sq.m/lit
Desiré MARMI & GRANITI:
4 to 12 sq.m/lit
(according to the color)
Adilux:
10 to 12 sq.m/lit
per coat

Drying time:

at 25°C:
4 ÷ 6 hours, touch dry;
about 24 hours
thoroughly dry.

Tool cleaning:
warm water

Intended use:

Any normal, paintable interior or exterior wall surface, either Gypsum
plaster based or rendered masonry.

Surface treatment: Ensure that the surface is clean, dry and sound.
Brush or roller apply one or two base coats of the dedicated basecoat
thinned with 20-30% of water. In case of new walls, old and powdery
walls or in presence of weak paint, first apply a coat of ADIFIX primer
thinned as specified and allow to dry.

Application:

Use the special DESIRE' brush and apply the MARMI & GRANITI
effect finish unevenly to the surface using short, crossed strokes, flipping
and overlapping each time. Start applications from the top corner
of the wall and work downwards. After about 10-15 minutes from
application, when the product has just started to dry, lightly pass the
Desiré Distender blade over the product in crossed movements to flatten
the raised particles and reach the desired final effect. After about 24
hours, when the effect finish has totally dried, apply one or two coats
of ADILUX protective varnish with a woolen roller to reach the sheen
desired. You can create faux joints and block marks using the marker
supplied in the kit. It is advised to design your joints beforehand to
ensure the desired result is reached.

Advices:

Do not apply with air and surface temperatures below 5°C or above
28°C. Carefully verify spread rates and the surface area to be coated to
avoid running short of product during the working process and reducing
the risk of differences in tones. It is also advisable to mix together the
product when using different lots and multiple cans for the same job.
Protect from freezing.